



Item No. _____

C152

Soft Serve Freezer

Single Flavor

Features

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet.

Freezing Cylinder

One, 1.5 quart (1.4 liter).

Mix Hopper

One, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low.

Electronic Controls

Softech™ is our exclusive microprocessor based master control that regulates refrigeration by measuring product viscosity to maintain consistent quality.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Door Interlock System

Protects the operator from injury as the beater will not operate without the dispensing door in place.

C152

750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm




Standard 6



LISTED
SA2650



Selected 50
Hz. Models

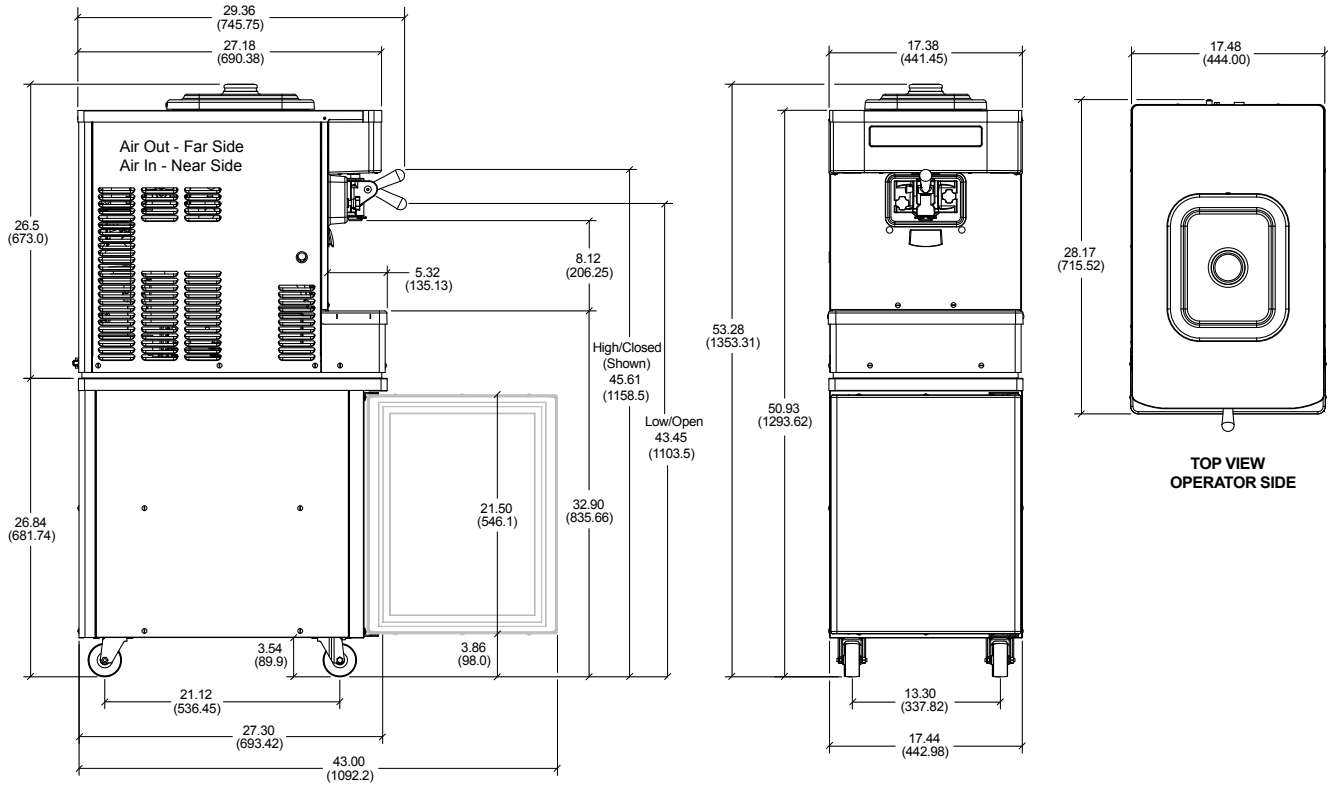

FIGURES IN BRACKETS INDICATE MILLIMETERS EQUIVALENT TO DECIMAL DIMENSIONS (PLUS OR MINUS 1/16 INCH [1.5MM]).

| Weights | lbs. | kgs. |
|---------|------|-------|
| Net | 207 | 94.0 |
| Crated | 238 | 108.0 |

| | cu. ft. | cu. m. |
|--------|---------|--------|
| Volume | 21.1 | 0.60 |

| Dimensions | in. | mm. |
|------------|----------|--------|
| Width | 17-31/64 | 444.0 |
| Depth | 29-23/64 | 745.75 |
| Height | 26-1/2 | 673.0 |

| Electrical | Total Amps | Supplied with NEMACord |
|------------------|------------|------------------------|
| 115/60/1 Air | 16.0 | 5-20P |
| 208-230/60/1 Air | 10.2 | 6-15P |
| 220-240/50/1 Air | 7.8 | ---- |

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor Distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information and approval marks, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: Air Water NA

Options: _____

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord connected. Consult the international Taylor distributor for cord & receptacle specifications for 50 Hz. equipment.

Beater Motor

One, 0.5 HP

Refrigeration System

One, 3,000 BTU/hr. R404A. Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134A. (BTUs may vary based on application)

Air Cooled

Minimum 4" (102 mm) on both sides. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Options

- Cone Dispenser
- 4" Legs (Must install skirt on right side of unit to prevent recirculation of warm air)

Authorized Taylor Distributor

REFLEX SERVICES
 IRIDIS - GROUPE
 ☎ 01.30.13.96.04
 ✉ equipe.commercial@iridis-groupe.com
 Consommables & Pièces détachées : www.iridis-groupe.com



TAYLOR®
 750 N. Blackhawk Blvd.
 Rockton, Illinois 61072
www.taylor-company.com
 026195-ADV 01/18